

GreenWatts Solar Panels

# SUPERIOR PERFORMANCE & RELIABILITY


## HS54-F-430-BOB(N)

HT54-18X(ND)-F-430

Solar Panel Monocrystalline  
Double Glass TopCon Module

### HIGHLIGHTS

- Maximum Power Output: 430W
- Maximum Efficiency: 22.0%
- Number of Cells: 108 (6x18)
- Bifaciality: 80 ±5 %
- All-Black Series

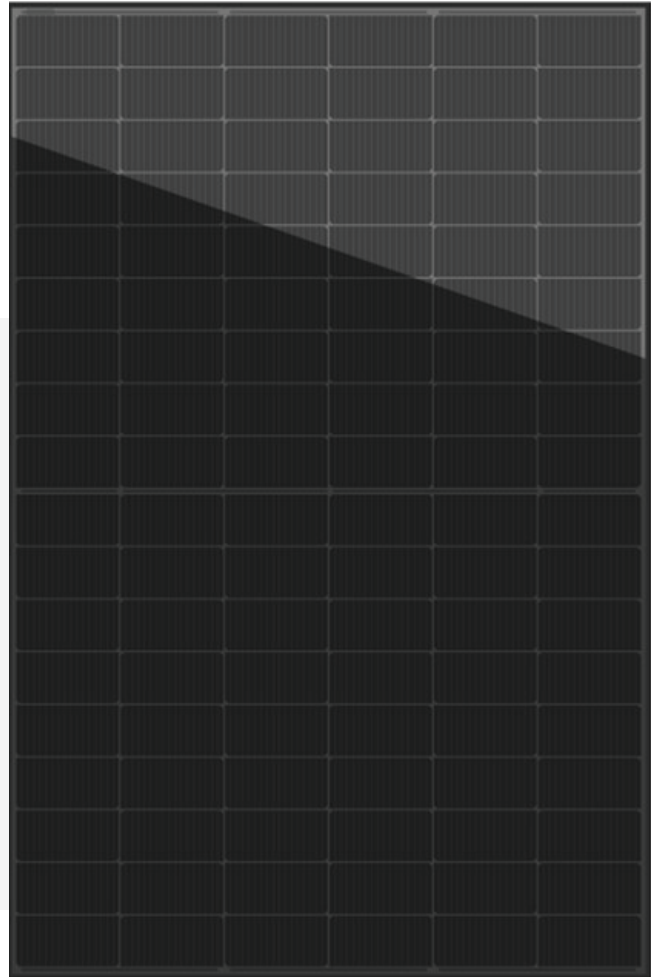

### Optimized for High Voltage Systems

- Specifically designed to align with advanced high voltage system requirements.
- Maximum Efficiency up to 22.0%
- Cost effective solutions designed to offer a competitive balance of system cost suitable for utility-scale projects.



### Durability in Extreme Conditions

- Engineered to endure harsh environmental conditions, such as extreme temperatures, high humidity, salt, mist, and sand.
- Supports up to 5400 Pa for snow loads and 2400 Pa for wind loads, reinforcing module reliability in diverse environmental conditions.



### Enhanced Efficiency with Half Cut Cell Technology

- Minimizes resistive losses and reduces shading impact, boosting overall efficiency.
- Ensures long term performance against Potential-Induced Degradation.

### High Reliability



Certification:



ISO 9001  
ISO 14001  
ISO 45001



UL 61730



IEC 61215  
IEC 61730



P: +1 (619) 354-3094  
E: sales@greenwatts.solar  
W: greenwatts.solar

Los Angeles  
9255 Sunset Blvd, Los  
Angeles, CA 90069

San Diego  
1094 Cudahy Place, Suite 212,  
San Diego, CA 92110

## MECHANICAL CHARACTERISTICS

Solar Cell	Monocrystalline 182 x 91mm
Number of Cells	108 (6x18)
Dimensions	1722 x 1134 x 30mm 67.80 x 44.65 x 1.18 inches
Weight	24.0 kg   52,911 lb
Front Glass	High transmission coated tempered glass
Back Glass	Heat strengthened glass
Frame	Anodized aluminium alloy
Junction Box	IP68 Rated
Output Cables	4mm <sup>2</sup>   0,00620001 in <sup>2</sup> (IEC)
Connectors	MC4
Maximum Power in STC (Pmax)	430 W
Maximum Operating Voltage (Vmp)	31.90 V
Maximum Operating Current (Imp)	13.50 A
Open Circuit Voltage (Voc)	38.30 V
Short Circuit Current (Isc)	14.23 A
Module efficiency	22.0%
Operating Temperature of the module	-40°C ~ +85°C
Maximum System Voltage	1500V DC
Power Tolerance	0 ~ +3%
STC	Irradiance 1000W/m <sup>2</sup> , Cell Temperature 25°C, Air Mass 1.5

## TEMPERATURE CHARACTERISTICS

NMOT	43 ±2 °C 109.4 ±35.6 °F
Temperature Coefficient of P <sub>MAX</sub>	-0.31% /°C
Temperature Coefficient of V <sub>OC</sub>	-0.25% /°C
Temperature Coefficient of I <sub>SC</sub>	+0.046% /°C



## PACKING CONFIGURATION

Module per Box	36 Pieces
Module per 40' Container	936 Pieces


## ADDITIONAL INFORMATION

Snow and wind loads	Wind - 2400Pa Snow - 5400Pa
IEC Protection Class (I, II, III)	II
Max installation altitude	2000m
Allow roof pitch/angle	Minimum 10 degrees
Max Series Fuse Rating	25A
Fire Rating	Type 29
Front Cover (material / glass thickness)	AR 2.0mm
Back Cover (material / glass thickness)	Normal glass 2.0mm
Bifaciality	80 ±5 %


## ENGINEERING DRAWING

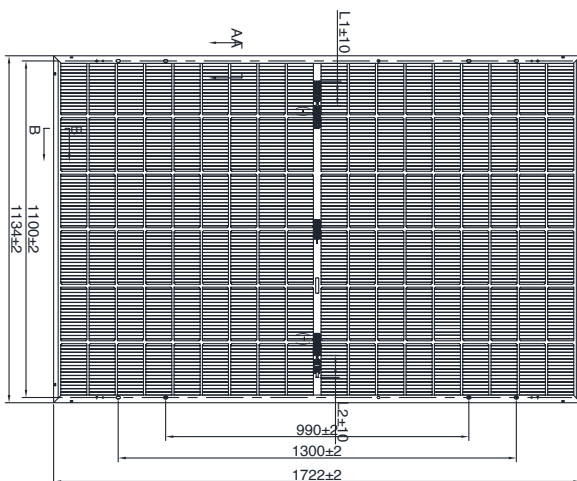

## IxV CURVE

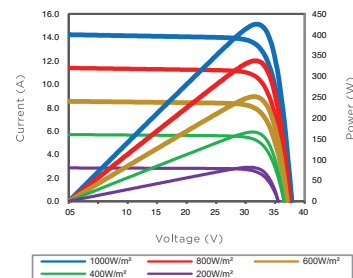

## PERFORMANCE WARRANTY

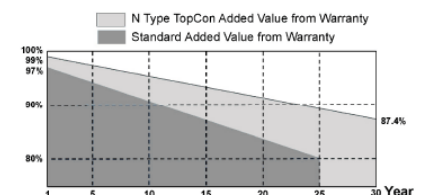

\*Specific information is referred to the product quality guarantee



P: +1 (619) 354-3094  
E: sales@greenwatts.solar  
W: greenwatts.solar

Los Angeles  
9255 Sunset Blvd, Los  
Angeles, CA 90069

San Diego  
1094 Cudahy Place, Suite 212,  
San Diego, CA 92110